

# Fostex



## T60RP

RP [Regular Phase] Stereo Headphones

### Owner's Manual


#### ■ Main Features

- \* The T60RP uses the proprietary RP diaphragm, which is copper foil etched on the high heat-resistant polyimide film as base material. Using Neodymium for the driver magnet, it has wide reproduction band, and realizes excellent transient characteristics and high resistance to input power up to 3000mW.
- \* The T60RP employs wood housing (African mahogany). As it is optimized for listening application, you can enjoy the rich sound quality with depth added to the delicate expression of the RP diaphragm.
- \* It comes with detachable connectors. You can choose the cables according to the usage environment and it can also handle balanced connections. By connecting to an audio player or headphone amplifier with balanced output, unnecessary noise can be suppressed, and you can enjoy clear sound quality with a good separation.
- \* Using high-quality OFC conductor for cable, it offers high resolution in all bands with a good sound separation.
- \* As for the yoke, it uses a new material with less than half of the conventional carbon content, realizing efficient magnetic transmission and improving linearity.
- \* The head pad uses genuine leather. It improves texture and offers stable wearing feeling.


#### ■ Product Specifications

|                 |                                                                                                                                                                                                                                                                                   |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type            | Semi-open RP Dynamic                                                                                                                                                                                                                                                              |
| Frequency Range | 15 ~ 35,000 Hz                                                                                                                                                                                                                                                                    |
| Impedance       | 50 Ω                                                                                                                                                                                                                                                                              |
| Sensitivity     | 92 dB/mW                                                                                                                                                                                                                                                                          |
| Max. Input      | 3,000 mW                                                                                                                                                                                                                                                                          |
| Weight          | Approx. 380 g                                                                                                                                                                                                                                                                     |
| Accessories     | <ul style="list-style-type: none"> <li>* φ3.5 mm (4-pole) &lt;-&gt; φ3.5 mm (3-pole) Stereo Phone Cable (1.5 m) x 1</li> <li>* φ3.5 mm -&gt; φ6.3 mm Stereo Phone Conversion Adapter x 1</li> <li>* Carry Bag x 1</li> <li>* Sticker x 1</li> <li>* Owner's Manual x 1</li> </ul> |

#### ■ Name of Parts

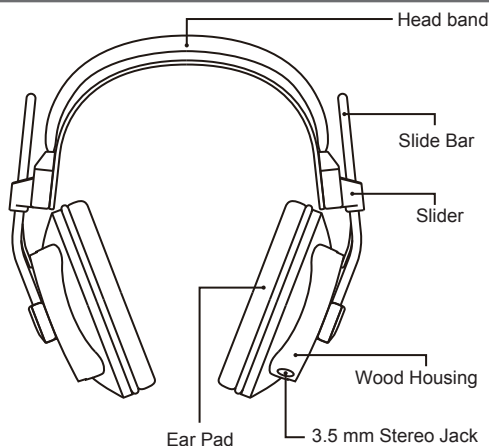


#### ■ Connection Diagram

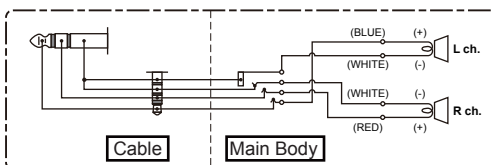

※ Connect the 4-pole plug to the main body.

#### ■ About Detachable Cable

It is designed that the headphone main body and cable are detachable. If the cable is deteriorated, please replace with the dedicated cable, model ET - RP 3.5 UB (optional), of the same specification as the accessory. In addition, the following optional cables are sold separately for this product. Using those cables, you can enjoy the sound quality of balanced connection.

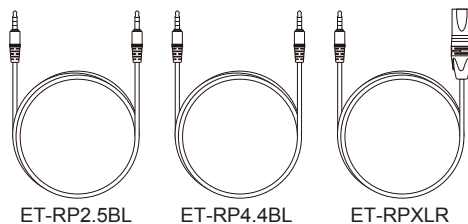

- ※ For the purpose of product improvement, the specifications may change without prior notice.
- ※ When using headphones, please refrain from using for a long time for not to irritate your ears, please use with a reasonable volume. Also, please never use headphones when driving a car or bicycle as you cannot respond to emergency situations, there is a risk of leading to a big accident.
- ※ The ear pad is a consumable item. It deteriorates due to everyday use and long term storage, please replace it as necessary.

# Fostex®

FOSTEX COMPANY

1-1-109, Tsutsujigaoka, Akishima City, Tokyo, 196-8550, Japan