




FE208NS

20cm Fullrange speaker

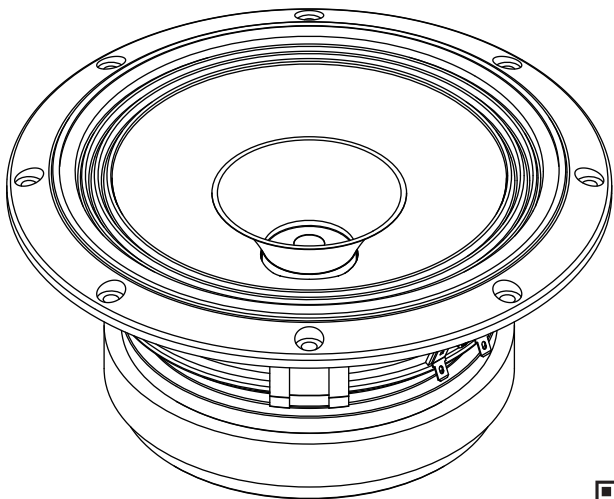



Specification Sheet



www.fostex.jp/products/fe208ns

In accordance with our policy of continuous development, we reserve the right to change specifications without notice Printed in China 642868

Dimensions / Polarity

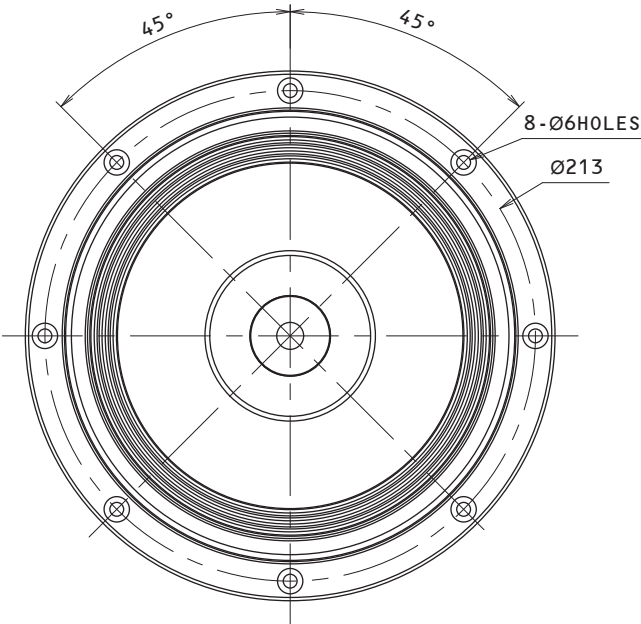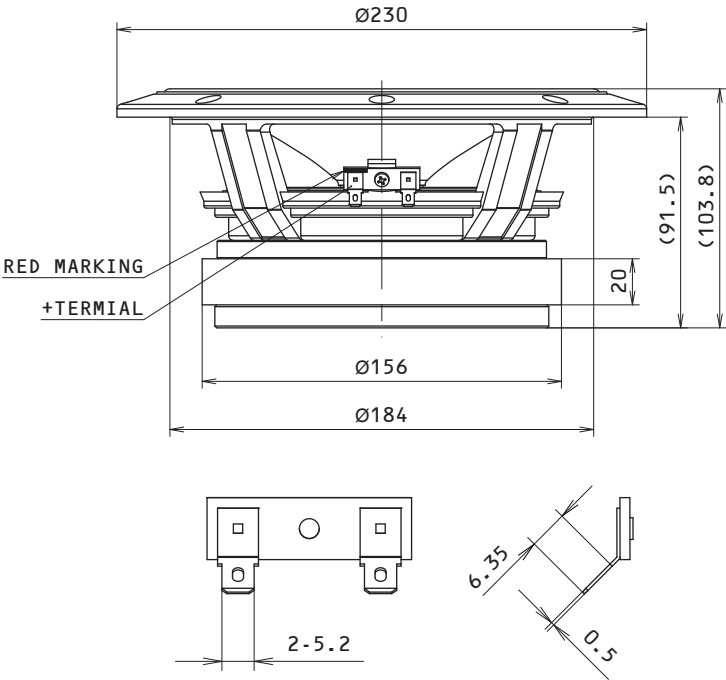


Standard Accessories

Speaker unit : 1pc	Specification sheet : 1pc
Screw : 8pcs	Application sheet : 1pc
Washer : 8pcs	Safety precautions : 1pc
Spacer : 1pc	

Specifications & Thiele / Small Parameters

Electrical Parameters	Nominal Impedance	8.0	ohm
	Re	6.6	ohm
	Le	0.19	mH
	fs (F0)	45	Hz
Mechanical Parameters	Mms (M0)	14.07	g
	Cms	0.91	mm/N
	Bl	10.79	N/A
Loss Factors	Qms	6.87	-
	Qes	0.22	-
	Qts (Q0)	0.22	-
Other Parameters	SPL (1m/1W)	94	dB
	Equivalent Diaphragm Radius (a)	81.0	mm
	Rated Input	40	W
	Max Input	-	W
	Overall Diameter	Φ230	mm
	Voice Coil Diameter	35.5	mm
	Reproduction Frequency Response	fs to 20k	Hz
	Vas	54.57	L
	Baffle Hole Diameter	Φ185	mm

Frequency Response

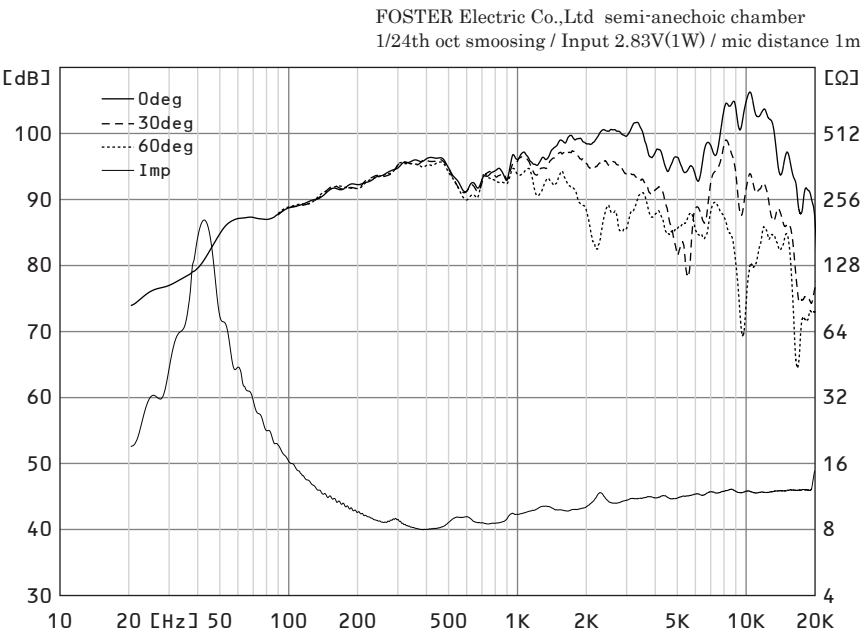

Components

