

Fostex

FE166NV2



16cm Fullrange speaker unit

FOSTEX CO.

1-1-109, Tsutsujigaoka, Akishima City, Tokyo, 196-8550, Japan

取扱説明書／Owner's Manual／Bedienungsanleitung／
Manuel du propriétaire／Manual del propietario／Ръководство
на собственика／Manual majitele／Instruktionsbog／
Kasutusjuhend／Εγχειρίδιο κατόχου／Käyttöopas／
Lámhleabhar Úinéara／Kezelési kézikönyv／Vlasnicki
priručnik／Manuale del proprietario／Savininko vadovas／
Īpašnieka rokasgrāmata／Manwal tas-Sid／Handleiding van
de eigenaar／Instrukcja obsługi／Manual do Proprietário／
Manual de utilizare／Návod na obsluhu／Navodila za
uporabo／Āgarmanual／操作说明／操作説明／취급 설명서


外形寸法／External dimensions／Äußere Abmessungen／Dimensions
extérieures／Dimensiones externas／Външни размери／Vnější
rozměry／Udvendige dimensioner／Välised mõõtmed／Εξωτερικές
διαστάσεις／Ulkomitat／Toisi seachtracha／Külső méretek／Vanjske
dimenzije／Dimensioni esterne／Išoriniai matmenys／Ārējie izmēri
／Dimensjonijiet esterni／Buitenaafmetingen／Wymiary zewnętrzne
／Dimensões externas／Dimensiuni externe／Vonkajšie rozmery／
Zunanje dimenzije／Yttre mått／外部尺寸／外部尺寸／외형치수

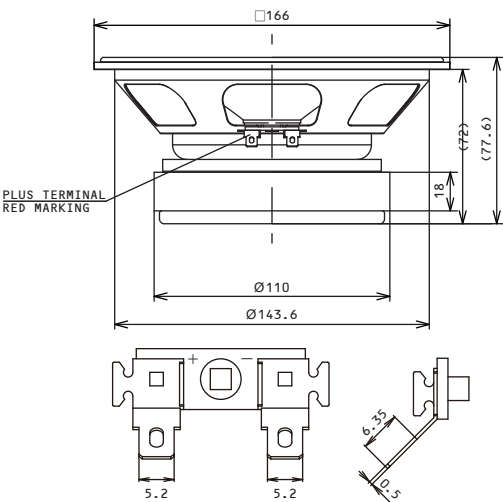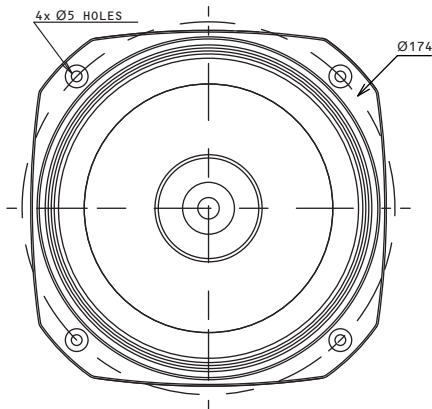

仕様／Specification (Thiele / Small Parameters) ／Spezifikation
／Spécification／Especificación／спецификация／Spèifikace
／Specifikation／Spetsifikatsioon／προσδιορισμός／Erittely
sonraiocht／Specificáció／Specifikacija／Specificazione
／Specifikacija／Specifikācija／Specifikazzjoni／Specificatie
／Specyfikacja／Especificação／Specificație／specificácia
／Specifikacija／Specifikation／規格／規格／ 사양

Electrical Parameters	Nominal Impedance	8.0	ohm
	Re	7.8	ohm
	Le	0.8	mH
	fs (F0)	49.6	Hz
	Mms (M0)	7.0	g
Mechanical Parameters	Cms	1.5	mm/N
	Bl	7.7	N/A
	Qms	7.88	-
Loss Factors	Qes	0.28	-
	Qts (Q0)	0.27	-
Other Parameters	SPL (1m/1W)	94.0	dB
	Equivalent Diaphragm Radius (a)	65.0	mm
	Rated Input	22	W
	Max Input	65	W
	Overall Diameter	166	mm
	Voice Coil Diameter	25	mm
	Reproduction Frequency Response	fs to 20k	Hz
	Vas	36.9	L
	Baffle Hole Diameter	Φ146	mm

周波数特性/Frequency response/Frequenzgang/Réponse/en fréquence/Respuesta de frecuencia/Частотна характеристика/Frekvenční odezva/Frekvensrespons/Sageduskarakteristik/Απόκριση συχνότητας/Taajuusvaste Freagairt minicíochta/Frekvenčiaátvétel/Frekvenzijski odziv Risposta/in frequenza/Dažnio atsakas/Frekvences reakcija/Rispons tal-frekwenza/Frequentierespons/Odpowiedź częstotliwościowa/Respota de frecuença/Rāspuns in frecvență/Frekvenčná odozva/Frekvenčni odziv/Frekvensrespons/频率响应/頻率響應/주파수 특성

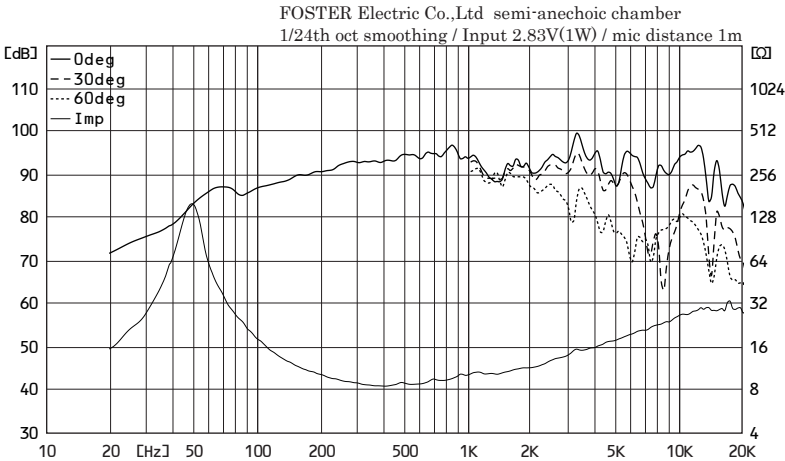


付属品/Accessories/Zubehör/Accessoires/Accessorios/Аксессуары/Príslušenství/Tilbehør/Aksessuaarid/Αξέσουάρ/Asusteet/Gabhálais/Kiegészítők/Pribor/Accessori/Priedai/Piederumi/Accessorji/Accessoires/Akcesoria/Acessórios/Accessorii/Príslušenstvo/Dodatki/Tilbehör/配件/配件/액세서리

Screw	4pcs
Spacer	1pc
Washer	4pcs
Safety precautions	1pc

Bass Reflex type Enclosure

thickness : 15mm

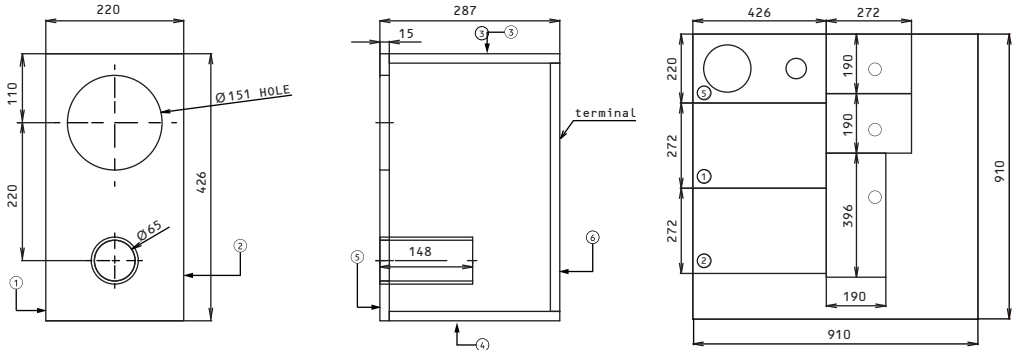

Backloaded horn type Enclosure

thickness : 15mm

